

P-40_{V2}

QUICK SET-UP GUIDE



Hello and thank you for purchasing this model from hobbyking.com. You'll find a full assembly manual for your brand new Durafly P-40 V2 by either scanning the QR code below, or on our website under the "Manual/Files" tab on the Durafly P-40 V2 page. However, if you are already a dab hand at assembling PNF's, you'll likely only need a few vital details to get you going. In which case, please find below info relating to the recommended control throws, battery sizes, and CG location for the 1100mm Durafly P-40 V2

Happy flying and we hope you enjoy this Hobbyking product.

SPECIFICATIONS

- **Wingspan:** 1100mm (43.3")
- **Flying Weight:** 1300-1400g (45-49oz)
- **ESC:** Durafly 45A Brushless ESC
- **Motor:** Durafly 3536 900kv Outrunner
- **Prop:** 10x5 Blade
- **Servos:** 7x9g (2 Aileron, 2 Flap, Elevator, Rudder, Bomb)
- **Controls:** 6-7ch Required (7 if using included bomb drop)
- **Retracts:** All Metal Twist & Turn, Electronic Retracts.


RECOMMENDED BATTERY

- 2200 mAh 4S LIPO BATTERY

CG LOCATION

- C of G is between 55-60mm when measured from the leading edge of the wing at the root. Carry out this check with the gear retracted and the model inverted.


CONTROL THROWS LOW - HIGH

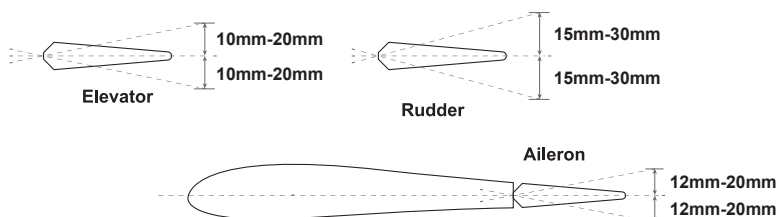


*Elevator 'low rates' 10mm 'high rates' 20mm in either direction from neutral.

*Rudder 'low rates' 15mm 'high rates' 30mm in either direction from neutral.

*Aileron 'low rates' 12mm 'high rates' 20mm in either direction from neutral.

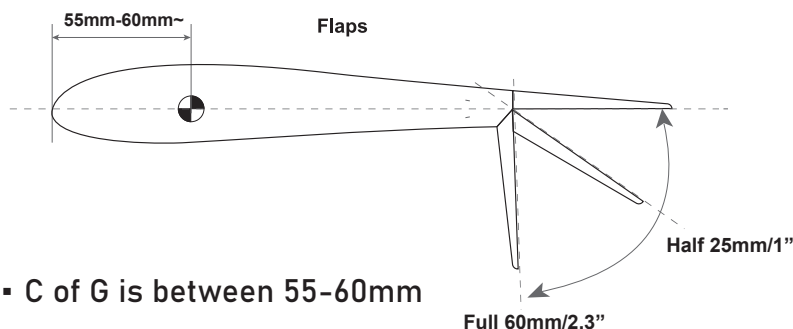

- C of G is between 55-60mm

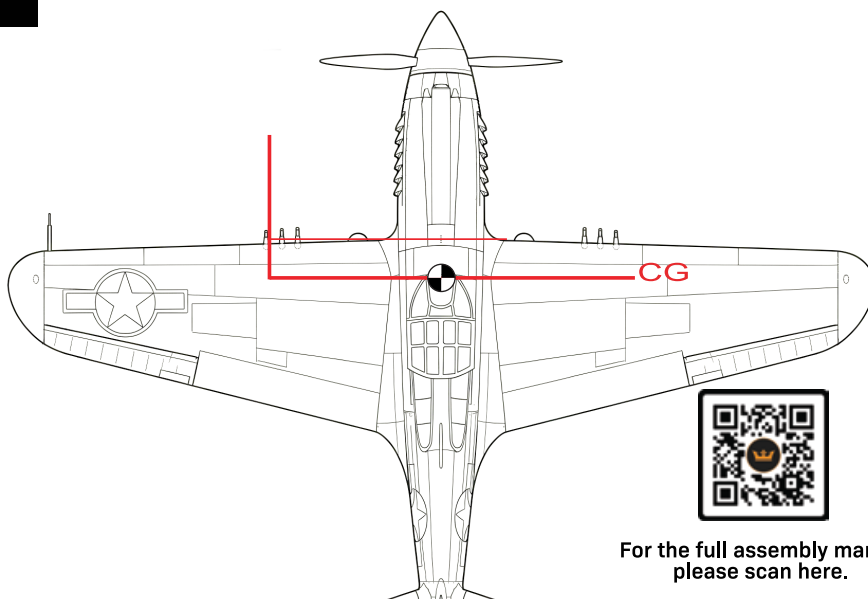

For the full assembly manual please scan here.

Conformity with Directives

This product(s) is CE marked to denote conformity with applicable Directives, as ammended.

Enviromental Protection

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

